

# 车用电磁阀

Solenoid valves for vehicle application

## ABS-L8T 系列二位三通电磁阀 Series 3/2-way solenoid valves



### 图形符号 Graphical symbols




### 产品特点 Features


ABS-L8T是二位三通截止式电磁换向阀。它接受电信号作切换气路方向用。具有结构简单、动作可靠、对气源介质要求不高等特点。

ABS-L8T is a 3/2-ways shut solenoid valve. It functions to switch over air route at electrical signals. It features simple structure, reliable action and low demand of medium quality.

### 型号注释 Note for type

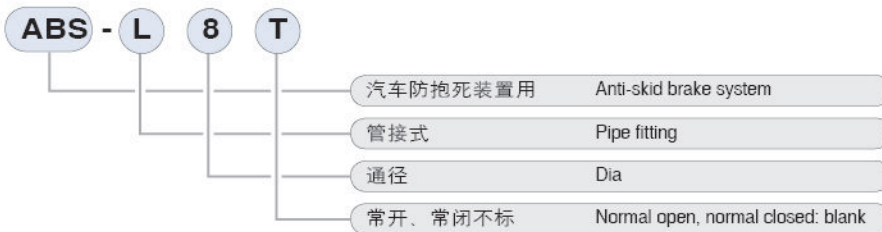

### 外形尺寸 Outlook & Dimension

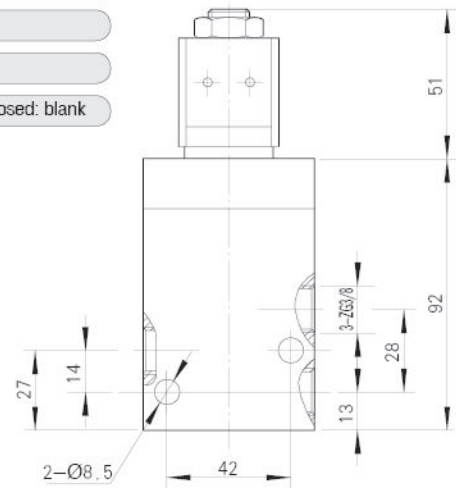

### 技术参数 Specification

工作介质 Working medium	干燥洁净的压缩空气 Dry and clean compressed air
公称口径 Dia(mm)	Ø8
工作温度范围 Working tempt range(°C)	-40~+80(在不冻结条件下) (On condition of no freezing)
工作压力范围 Working pressure range(MPa)	0.2~1
换向时间 Direction diverting(sec)	≤0.04
最高切换频率 Max switch-over(Hz)	13
泄漏量 Leakage rate	0
有效截面积S值 Effective sectional area S value(mm <sup>2</sup> )	20
额定流量 Flow rate(m <sup>3</sup> /h)	5
气路接口 Connection of air pipeline	ZG3/8, 或用户定 or up to user

